

# INDOOR DIGITAL SIGNAGE

## LARGE SIZE FORMAT APPLIED SCREEN

CLASS

MODEL

75"

D75XMNI

### KEY FEATURES

- Support HDMI 2.0 & VGA
- USB Plug & Play (JPG & MP4)
- Power Consumption Reduced at 40% Compared to Normal Display
- Portrait / Landscape Orientation
- High Connectivity
- High Fidelity Audio Output (SPDIF)
- Industrial grade components with 24/7 operation reliability
- Touch Screen



# HYUNDAI

## Broadcast your branding with HYUNDAI IT Digital Signage!

Thanks to the advanced product design, HYUNDAI IT Digital Signage Display meets requirements for various digital signage solutions. Not only take advantage from slim and simple design, but also think more about our future environment, saving energy up to 40 percent. LED technologies bring more than just expected.



# HYUNDAI

### SPECIFICATIONS

Model	D75XMNI
Screen Size (diagonal)	75"
Active Display Area (inch / mm)	64.947 x 36.533   1649.664 x 927.936
Resolution	3840 x 2160
Aspect Ratio	16 : 9
Display Colors	1.06B
Brightness (cd/m²; typ.)	650
Contrast Ratio	1200:1
Response Time (ms; GTG)	6
Viewing Angle	178°/178°
Lifetime (hours)	50,000
Backlight type	LED
Available Touch Point	1 - 20
Response Time (ms)	1P Touch : 5 / 20P Touch : 15
Tempered Glass	5T
Minimum Touch Object (mm)	Single Touch : Ø 6 Multi Touch : Ø 8
Interface	USB 1.0 / USB 2.0 Full speed / USB3.0
Detection Method	Infrared Rays
HID (Mouse Click)	Windows / Linux / Mac / Android
Resolution	3840 x 2160
Input	1xVGA   3xHDMI   1xPC Audio   1xRS232C   1xUSB(MMP) 1xIR   1xDPI(Optional)   1xRJ45(Optional)
Media Player (USB)	Movie : MPEG-2   MPEG-4 Photo : JPEG   PNG   BMP Music : MP3
Output	1xHDMI   1xIR   1xRS232C   1xSPDIF   Audio-Line Out   Speaker(Optional)
Power	Input Voltage : 100 - 240V AC Power consumption : 230W
Features	Auto Power Control : Yes Auto Brightness Sensor : Yes
Operation	Temperature (°C) : 0 - 40 Humidity (%) : 20 - 80 OSD Language : 12 Lang
Dimension	Set Size : W x H x D (inch   mm) : 66.94 x 38.55 x 3.15   1700.3 x 979.2 x 79.9 Bezel Size : U/D/L/R (inch   mm) : 0.93 / 0.93 / 0.93 / 0.93   23.5 / 23.5 / 23.5 / 23.5 Wall Mounting hole : WxH (mm) : 800 x 400 / 800 x 600 (M8)
Weight	Set (lb   kg) : 184.09 / 83.5

Specifications and design are subject to change without notice. See our website for detailed information.

**HEAD OFFICE - HYUNDAI IT CO., LTD.**  
5F, 36, Sangil-ro 10-gil, Gangdong-gu, Seoul, 05288 Korea  
Tel. +82 70 7008 0151 E-mail: ssoh@hyundaiit.com  
www.hyundaiit.com

**HYUNDAI IT AMERICA TECH CORP**  
2033 Gateway Place 5th Floor San Jose, CA 95110, USA  
Tel. +1 408 627 4729 email : sales@hyundaita.com  
www.hyundaiit.com

## LARGE SIZE FORMAT APPLIED SCREEN

MODEL

CLASS

D75XMNI

75"

### FEATURES

#### Special Out-Of-Home LCD Panel

By using commercial grade LCD panels for Out-Of-Home applications, HYUNDAI Digital Signage display can provide higher brightness and contrast than standard LCD TV panels. This guarantees longer working time, deliver clear and bright image contents in the portrait or landscape format without any loss of quality.

#### LED Backlight

HYUNDAI IT's public displays with LED backlight bring the advantage of up to 40% lower power consumption, compared to displays with CCFL backlight.

#### Cost Effective Media Player



HYUNDAI IT's display serves in-built media player enables to play various range of content including video, images and photos. Thanks to this solution, no need for an additional media player for cost and space efficiency.

#### Multi Touch Screen Function

As an option, all HYUNDAI Digital Signage Displays can be equipped with touch screen functionality. Based on the infrared ray matrix technology, Digital Signage display can operate with either single- or multi-touch mode. This makes the HYUNDAI's Digital Signage display more advanced touch screen solution for the interactive display.

### DIMENSIONS

[ Unit: mm[inch] ]

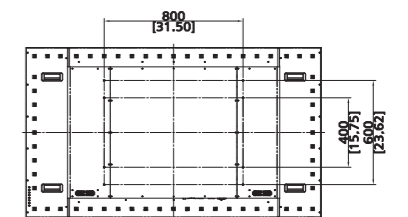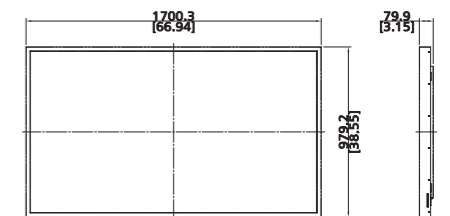

UPDATE: MAY. 2022

**HYUNDAI IBT GMBH**  
Carl-Zeiss-Str. 9 / 55129 Mainz, Germany  
Tel. +49(0) 6131 275 5350 email : info@hyundaiit.eu  
www.hyundaiit.eu