

# INDOOR DIGITAL SIGNAGE

## VIDEO WALL TYPE SCREEN

CLASS

MODEL

55" M55BFD

### KEY FEATURES

- Extreme Narrow Bezel, 1.74mm B to B
- Power Consumption Reduced at 40% Compared to Normal Display
- Built in Video Wall Function
- Portrait / Landscape Orientation
- High Connectivity
- UHD Resolution Daisy Chain



# HYUNDAI IT CO., LTD.

## Broadcast your branding with HYUNDAI IT Digital Signage!

According to the advanced product design, HYUNDAI IT Digital Signage Display meets necessary requirements for various digital signage solutions. LED BLU products of HYUNDAI IT can be up to 40 percent more energy saving compare to normal display, and environmentally friendly for the Eco-display.



# HYUNDAI IT CO., LTD.

### SPECIFICATIONS

Model		M55BFD
Panel	Screen Size (diagonal)	55"
	Active Display Area (in/mm)	47.62 x 26.79   1209.6 x 680.4
	Resolution	1920 x 1080
	Aspect Ratio	16 : 9
	Display Colors	1.07B
	Brightness (cd/m²; typ.)	500
	Contrast Ratio	1000 : 1
	Response Time (ms; GTG)	8
	Viewing Angle	178° / 178°
	Lifetime (hours)	100,000
Resolution	Monitor	1920 x 1080
	Backlight type	LED
Input		1xDP   1xRJ45   1xVGA   1xHDMI   1xDVI 1xUSB(F/W Update)   1xRS232C   1xIR
Output		1xDP ( 1xIR / 1xRS232 (Via DP Cable)), 1xRS232
Power	Input Voltage	100 – 240V AC
	Power consumption	175W
Features	Multi-screen function (Loop)	DP(HDMI)   RS232   IR   DVI
	Cooling System	Yes
	Auto Power Control	Yes
Operation	Temperature (°C)	0 - 40
	Humidity (%)	20 - 80
Dimension	Set Size : W x H x D (mm)	1212.2 x 683 x 85
	Bezel Size : L/R/U/D (mm)	1.3 / 0.44 / 1.3 / 0.44
	Bezel to Bezel Size (mm)	1.74
	Wall Mounting hole : WxH (mm)	600 x 400 (M8)
Weight	Set (kg)	20.5

# VIDEO WALL TYPE SCREEN

MODEL

CLASS

M55BFD 55"

### FEATURES

#### Auto color calibration

In order to save time of installation and maintenance experienced by previous extra camera solution, HYUNDAI IT's auto color calibration makes adjustments to automatically ensure uniformity across all video wall displays embedded with calibration chipset. This new color calibration procedure enables to keep consistency of video wall display's operational lifespan.

#### Exterme Narrow Bezel

Combined with the cutting edge function, Exterme narrow bezel design ensures a maximum screen area with unified images and a minimum of viewable interruptions.


#### Easy operating OSD menu, Remote control

In order to setup a multi display wall, the single units are linked by a daisy chain connection over DP. The configuration of each display can be easily set-up over the on-screen menu or the RS232C interface.

#### 4K Daisy Chain

No more peripheral devices needed to configure 4K native video contents, HYUNDAI IT's display enables high-end 4K @60Hz video contents simply loop through the daisy chain without image distortion.

### DIMENSIONS

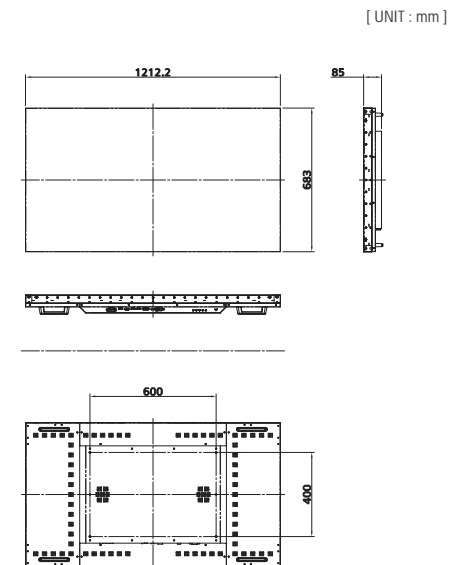

Specifications and design are subject to change without notice. See our website for detailed information.

UPDATE: JAN. 2023

**HEAD OFFICE - HYUNDAI IT CO., LTD.**  
5F, 36, Sangil-ro 10-gil, Gangdong-gu, Seoul, 05288 Korea  
Tel. +82 70 7008 0151 E-mail: ssoh@hyundaiit.com  
www.hyundaiit.com

**HYUNDAI IT AMERICA TECH CORP**  
2033 Gateway Place 5th Floor San Jose, CA 95110, USA  
Tel. +1 408 627 4729 email : sales@hyundaita.com  
www.hyundaiit.com

**HYUNDAI IBT GMBH**  
Carl-Zeiss-Str. 9 / 55129 Mainz, Germany  
Tel. +49(0) 6131 275 5350 email : info@hyundaiit.eu  
www.hyundaiit.eu