

Smartboard $\alpha_{3.0}$

CLASS

MODEL

65"

S65UDAI

An intuitively Easy Smart Board α 3.0 Solution

Our Smart board α 3.0 - displays, software, services and support all work together - giving you the tools to share information and ideas in visual and interactive way. With a smart board α 3.0, your resources are at your fingertips - whether you're in a meeting room, an R&D lab or the dealer shop.



HYUNDAI

HYUNDAI

SPECIFICATIONS

Model		S65UDAI
Panel	Screen Size (diagonal)	65"
	Active Display Area (mm)	1428.48(H) x 803.52(V)
	Resolution	3840 x 2160 (UHD)
	Brightness (cd/m²; typ.)	350
	Contrast Ratio	1200 : 1
	Response Time (ms; GTG)	8
	Viewing Angle	178° / 178°
Touch Screen	Touch Accuracy (typ.)	± 1mm
	Touch Point	Windows 7/8/10, Android - 20 points Windows XP, Linux, Mac, Chrome - 1 point
	Detection Method	Advanced infra-red
Systems	Standard	Android 9.0
	Operating Systems	Windows 7/8/10, Windows XP, Linux, Mac, Chrome
Mother board	CPU / GPU	Cortex A73, 1.8GHz / Mali G52 MP2
	RAM / ROM	4GB LPDDR4 / 32GB eMMC Flash
Wi-Fi	Main Chipset	MT7668BU+RTL8822BU
	Operating Frequency	2.4GHz/5GHz
	Wifi Standard	802.11a/b/g/n/ac
	Bluetooth	2.1+EDR/4.2/5.0
NFC	Standard	ISO/IEC 14443 A / ISO/IEC 14443 B
	Read/Write Distance	< 30mm
	Read/Write Speed	106 to 424kbps
Camera	Pixel	13 Mega
	FOV	78°
	Array Size (MJPEG)	3840x2160(12fps) / 4139x3104(8fps) 1280x720(30fps) / 1920x1080(30fps)
Array Mic	Array Count	6-Mic
	Pick up Distance (max)	8m (Angle : 45°~135°)
Support Features		Echo Removal / Noise Suppression / Dialog Improvement / Auto Gain
Features	Speaker	15W x 2
	Tempered Glass	3.2T (Anti Glare)
	Anti-Finger Print / Anti-Microbial	Yes
Operation	Temperature (°C)	0 - 40
	Humidity (%)	20 - 80
Power	Input Voltage	AC 100 ~ 240 V, 50/60Hz
	Power consumption	300W
Interface	Front	1xHDMI 2.0-In 1xUSB3.0(PC) 1xUSB3.0(Android) 1xUSB3.0(Touch) 1xUSB Type-C
	Side	2xLAN 1xUSB3.0(Touch) 1xUSB2.0 1xDP-In 2xHDMI 2.0-In 2xUSB3.0
	Bottom	1xHDMI-Out 1xMic-In 1xAudio-Out 1xSPDIF-Out 1xAudio-In 1xVGA 1xRS232-In
	OPS	Ready
Wall Mounting (WxH), mm		600 x 400 (M8)
Dimension	Set (W x H x D) mm in	1511 x 928.85 x 93.25 59.49 x 36.57 x 3.67
Weight	Set (kg lb)	46 101.41
Optional Stand		
Movable Stand Set (W x H x D) mm in		1285 x 1760 x 700 50.59 x 69.29 x 27.56

Smartboard $\alpha_{3.0}$

MODEL

CLASS

S65UDAI

65"

CORPORATE SOLUTIONS

Design Engineering

HYUNDAI IT smart board α 3.0 Solutions make it easy to review project materials and work with other resources on a large interactive surface. You share information visually, whether your teams are local or dispersed.

Business Process Management

HYUNDAI IT smart board α 3.0 Solutions can help stakeholders and process owners collaborate to support agile development principles - from definition and analysis to activity mapping, improvement targets and ongoing measurement.


Product development

HYUNDAI IT smart board α 3.0 Solutions, you can bring experts together in one room, regardless of location. You can work with file and applications on a large interactive and contribute to the work in real time.

Training

With HYUNDAI IT smart board α 3.0 Solutions, trainers can display and work with information on a large, interactive surface. And because our products are interactive, training participants can be involved in working with the material, making annotations and navigating the content themselves.

DIMENSIONS

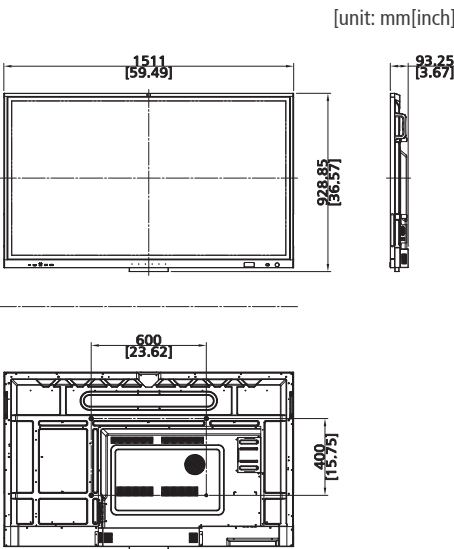

Specifications and design are subject to change without notice. See our website for detailed information.

UPDATE: DEC. 2021

HEAD OFFICE - HYUNDAI IT CO., LTD.
5F, 36, Sangil-ro 10-gil, Gangdong-gu, Seoul, 05288 Korea
Tel. +82 70 7008 0151 E-mail: ss0h@hyundaiit.com
www.hyundaiit.com

HYUNDAI IT AMERICA TECH CORP
2033 Gateway Place 5th Floor San Jose, CA 95110, USA
Tel. +1 408 627 4729 email : sales@hyundaita.com
www.hyundaiit.com

HYUNDAI IBT GMBH
Carl-Zeiss-Str. 9 / 55129 Mainz, Germany
Tel. +49(0) 6131 275 5350 email : info@hyundaiit.eu
www.hyundaiit.eu